

VEGA-RC


- Reduces the number of coins in coin hoppers
- Reduces machine downtime caused by hopper starvation
- Reduces operating costs due to the less frequent refilling of hoppers
- Statistics show 10 – 40% revenue increase depending on the installation site



VEGA-RC TWIN RECYCLER ANTI-VIBRATION PACKAGE

Compliance with the Vibration Standards of EN50155 – DIN EN 61373:2011-04 and IEC61373:2010-05

RC TWIN Recycler
(2-denomination recycling or
1-denomination recycling +
30-note escrow)

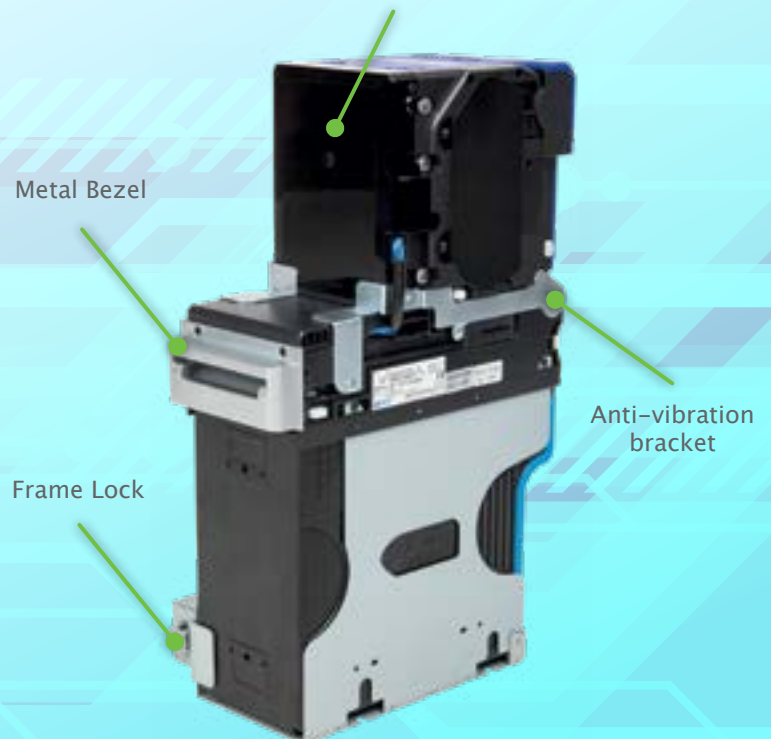

BANKNOTE SIZE

- Length: 110–165mm (4.33 – 6.50")
Recycling Module 160mm only
- Width: 60– 82mm (2.36–3.23")

NUMBER OF RECYCLED DENOMINATIONS

- 2 denominations

PROCESSING SPEED

- Stack completion approximately 3 seconds (VEGA only)
- Stack completion approximately 3 seconds (into recycler)
- Dispense approximately 2 seconds (from recycler)

ESCROW

- 1 banknote without RC
- The 30 note RC can be configured as an Escrow Drum

CASHBOX CAPACITY

- Capacity approximately 300 notes standard (1,000 notes options)
- Access rear or front (SH type)
- Access rear or upward (SU, SD type)
- LD Stackerless

RECYCLE CAPACITY

- Vega-RC: Capacity up to 30 note (150mm new notes/I.E., £20 sterling)
- Vega-RC Twin: 30 note X 2 denomination (60 notes total)

PROCESSING SPEED

- Accepting banknotes to RC: 3 seconds
- Accepting banknotes to cashbox: 3 seconds
- Pay out: 3 seconds

SUPPLY VOLTAGE

- DC 12V (+5%), 2.0A recommended
- DC 12V (+5%), 5.0A recommended (Vega + Vega-RC)
- DC 20V to DC 42.5V, 2.5A recommended (option)
- Standby 0.2A (DC 12V), Operation 0.7A (Max. 1.0A), (DC 12V)
- Standby 0.1A (DC 24V), Operation 0.5A (DC 24V)

INTERFACE

- Photo-coupler isolation: RS232C,TTL

PROTOCOL

- ID-003, cc-Talk, MDB
- Multiple protocols in one software


ENVIRONMENT OPERATING 0 TO 50° C (32 TO 122° F)

- Storage 20 to 60° C (-4 to 140° F)
- Operating Humidity 30% – 80% RH (non-condensed)
- Storage Humidity 10% – 85% RH (non-condensed)

APPROVALS

- CE/UL

SECURITY FEATURES

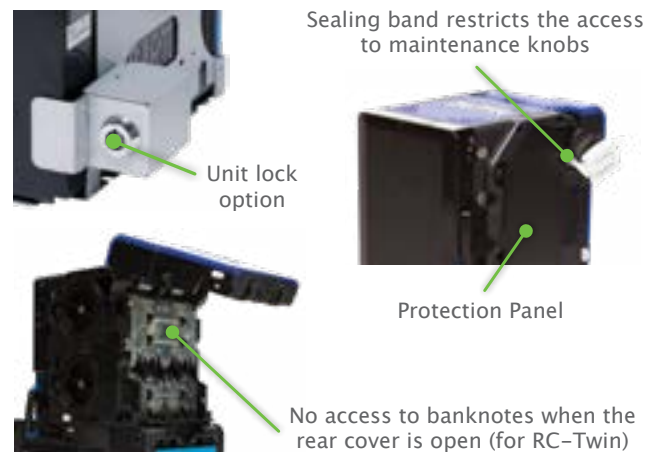

Your Source For **SECO**

Head Office Germany

POS 5 KB 5

Ö 5

